



Application area

- Shipping
- Machinery construction
- Chemical and petrochemical industry
- General process technology

Technical data

Constructional design / case

Design:	High quality case with bajonet ring, material: stainless steel mat.-no. 1.4301 (304)
Nominal size:	NS 100 or NS 160
Degree of protection per EN 60529:	IP 66
Filling:	For damping the whole measuring system. Depending on measuring range: Labofin (from -40 °C...100 °C) or silicone oil (from -110 °C...250 °C)

Case seal:	Material gasket: NBR
Window:	Non-splintering laminated glass. Option: Non-splintering plastic (Macrolon)
Pointer shaft:	Stainless steel mat.-no. 1.4571 (316Ti), with plastic bearing With highly flexible joint helix for thermometers with adjustable angel stem
Scale:	Pure aluminium, white with black inscription
Pointer:	Pure aluminium, black with adjustment for zero point correction

Features

- High quality case with bajonet ring NS 100/160, degree of protection IP 66
- Nominal ranges -40 °C...600 °C, further nominal ranges from -110 °C...600 °C upon request
- Case and wetted parts of stainless steel
- Different connections can be supplied
- Accuracy class 1 as per EN 13190
- Adjusting pointer for indication correction
- EAC declaration (upon request)

Options

- Approvals/Certificates
 - Explosion protection (ATEX) for mechanical devices
 - Certificate of measuring equipment for Russian Federation
 - Calibration certificate as per EN 10204
- Case with liquid filling
- Connection to zone 0 with thermowells (upon request)

Application

These thermometers are suitable for use outdoors and in aggressive environments. The devices can also be supplied with additional liquid damping for use in extreme conditions. Suitable thermowells see product group T5.

Weights:

Bottom connection

NS 100:	
without filling:	approx. 0.4 kg
with filling:	approx. 0.6 kg
NS 160:	
without filling:	approx. 0.8 kg
with filling:	approx. 1.5 kg

Centre back connection

NS 100:	
without filling:	approx. 0.4 kg
with filling:	approx. 0.5 kg
NS 160:	
without filling:	approx. 0.8 kg
with filling:	approx. 0.9 kg

Adjustable angel stem

NS 100:	
without filling:	approx. 0.6 kg
with filling:	approx. 0.7 kg
NS 160:	
without filling:	approx. 0.9 kg
with filling:	approx. 1.0 kg

Process connection

- Design:
- rigid temperature detecting element, bottom connection
 - rigid temperature detecting element, centre back connection
 - rigid temperature detecting element, adjustable angle stem (90°)

Various process connections can be supplied (see order details).

Measuring element

Measuring element: Helix from thermostatic bimetal per DIN 1715, with good adjusting force and fast acting, thermally aged. Base and connecting piece laser welded.

Temperature sensor

Temperature-detecting element: Diameter 6 or 8 mm, standard lengths available.
See order details, further sizes upon request.
Material: stainless steel mat.-no. 1.4571 (316 Ti)

Nominal range

Nominal range (EN 13190): -40 °C...500 °C (with restrictions also 600 °C), see order details.

Further nominal ranges from -110 °C up to 600 °C (no normal range) upon request.

Accuracy

Accuracy class: 1.0 per EN 13190

For devices with adjustable angle stem:

The accuracy class does not take into account a possible error, which can be caused by altering the position of the joint. However, this possible error can be compensated for re-adjusting with the adjustable pointer.

Temperature ranges

Ambient: Per EN 13190.
Ambient temperatures that deviate from EN are to be specified.

Storage and transport: -20...60 °C
Further temperature ranges upon request.

Tests and certificates

Explosion protection: Ex- protection (ATEX) for mechanical devices
⊕ II 2G c TX
⊕ II 2D c TX

Further details and temperature limits see Ex Instruction XA_005.

- EAC declaration (upon request)
- Certificate of measuring equipment for Russian Federation

Instructions for use

The loading capacity of the temperature detecting element depends on the following parameters:

- Media
- Media pressure
- Media temperature
- Flow velocity
- Insertion length
- Material


A technical examination might be necessary as well as the use of a separate thermowell (Product group D5).

Information on other models see order details or upon request.

Further information to mounting and operation see Operating Instruction BA_017.

Dimensions


Dimensions bottom connection

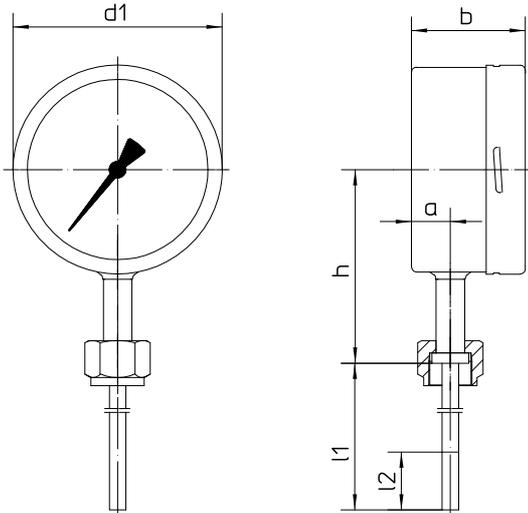

The sensitive portion l2 shall reach the media temperature completely.
The insertion length l1 should have adequate size.

Dimensions (mm)					h (up to sensor) see order details					for nominal range >300°C the necktubes (dimension h) are extended by 36 mm.
case	d1	A	b	l2	D1001	D1107/1109/1122	D1207	D2007	D2009	
NS 100	100	15	60	65	97	79	97	97	97	
NS 160	161	15	60	65	127	109	97	97	97	


Dimensions centre back connection

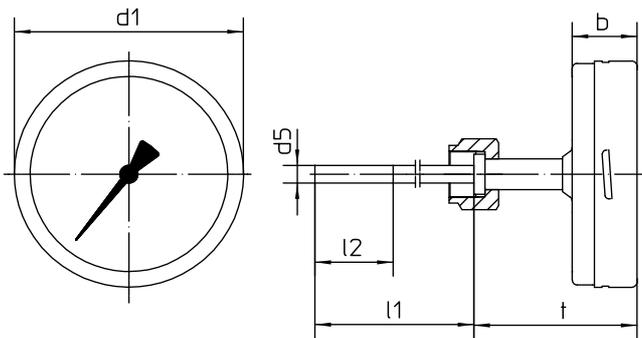

The sensitive portion l2 shall reach the media temperature completely.
The insertion length l1 should have adequate size.

Dimensions (mm)				t (up to sensor) see order details					for nominal range >300°C the necktubes (dimension t) are extended by 36 mm.
case	d1	b	l2	D1001	D1107/1109/1122	D1207	D2007	D2009	
NS 100	100	27	65	73	56	73	73	73	
NS 160	161	29	65	74	57	74	74	74	


Dimensions adjustable angle stem

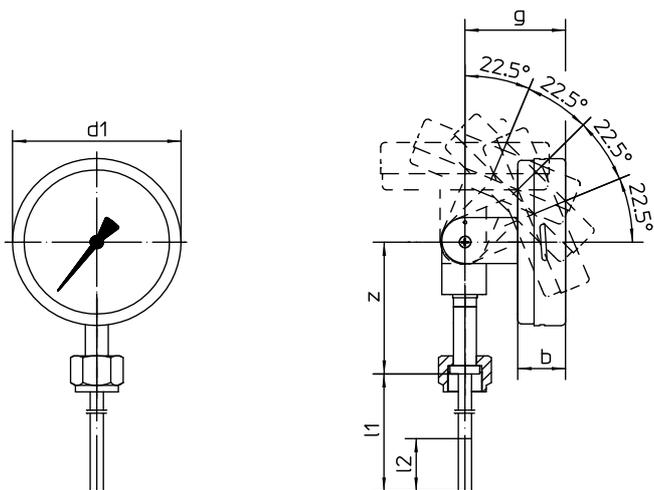

The sensitive portion l2 shall reach the media temperature completely.
 The insertion length l1 should have adequate size.

Dimensions (mm)										
case	d1	b	g	l2	z (up to sensor) see order details					for nominal range >300°C dimension z increases by 36 mm.
					D1001	D1107/1109/1122	D1207	D2007	D2009	
NS 100	100	27	60	65	76	60	80.5	80.5	80.5	
NS 160	161	29	60	65	76	60	80.5	80.5	80.5	

Dimensional drawing of bottom connection, centre back connection and adjustable angle stem

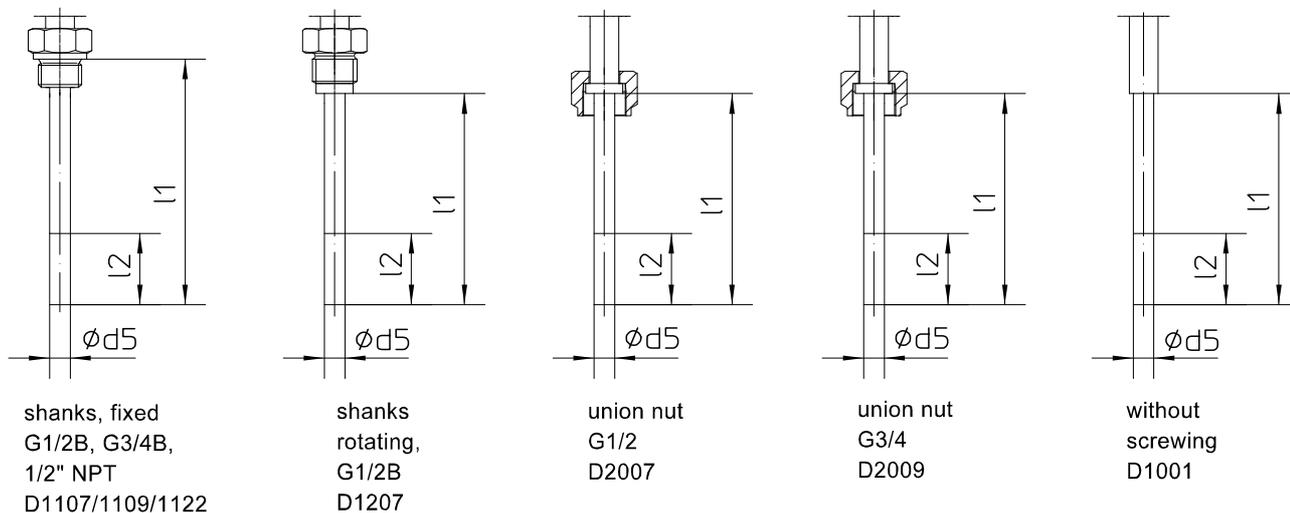

shanks, fixed
 G1/2B, G3/4B,
 1/2" NPT
 D1107/1109/1122

shanks
 rotating,
 G1/2B
 D1207

union nut
 G1/2
 D2007

union nut
 G3/4
 D2009

without
 screwing
 D1001

Order details

Bimetal thermometer Type series FA....

Order details FA....						
FA2400	case design degree of protection IP 66	bottom connection	NS 100	without liquid filling		
FA3400			NS 160			
FA2600			NS 100	with liquid filling		
FA3600			NS 160			
FA2300		centre back connection	NS 100	without liquid filling		
FA3300			NS 160			
FA2500			NS 100	with liquid filling		
FA3500			NS 160			
FA2310		adjustable angel stem	NS 100	without liquid filling		
FA3310			NS 160			
FA2510			NS 100	with liquid filling		
FA3510			NS 160			
			nominal ranges	measuring ranges		
A2340		standard ranges [°C], accuracy class 1 per EN 13190	-20...40		-10...30	
A2346	-20...60		-10...50			
A2322	-30...50		-20...40			
A2220	-40...40		-30...30			
A2222	-40...60		-30...50			
A2520	0...60		10...50			
A2522	0...80		10...70			
A2524	0...100		10...90			
A2540	0...120		20...100			
A2544	0...160		20...140			
A2548	0...200		20...180			
A2560	0...250		30...220			
A2565	0...300 ¹		30...270 ¹			
A2625	0...350 ¹		30...320 ¹			
A2627	0...400 ¹		50...350 ¹			
A2630	0...500 ¹		50...450 ¹			
A2640	0...600 ¹		100...500 ¹			
D1107	process connection	shanks, fixed	G1/2 B			
D1109			G3/4 B			
D1122			1/2 NPT			
D1207		shanks, rotating	G1/2 B			
D2007		union nut	G1/2			
D2009			G3/4			
D1001		without screwing				
F6		temperature detecting element Ø d5	6 mm			
F8	8 mm					
	insertion length l1 (mm) ²	D11.. shanks fixed	D1207 shanks rotating G1/2 B	D2007 union nut G1/2	D2009 union nut G3/4	D1001 without screwing
...		100	080	089	093	100
...		160	140	126	130	160
...		250	230	186	190	250
...		400	380	276	280	400
...		-	-	426	430	-
999	deviating lengths; please specify					

Additional features (to be indicated if required)		
S30	Ex-protection (ATEX) for mechanical devices ³	⊕ II 2G c TX
		⊕ II 2D c TX
R13	window	macrolon with adjustable reference pointer ⁴
T2	marking	on scale (please specify)
W1204	calibration certificate	per EN 10204-3.1, 3 measuring points
W1201		per EN 10204-3.1, 5 measuring points
W2673	certificate of measuring equipment for Russian Federation ⁴	

Order code (example): FA2300 - A2524 - D1107 - F6 - ...

¹ nominal range or measuring range not available with case filling

² standard insertion length to be specified in order code, e.g. Ø d5= 6 mm, l1 = 100 mm: order code F6100

³ within the temperature limits according to Ex instruction XA_005

⁴ not for devices with Ex-protection